


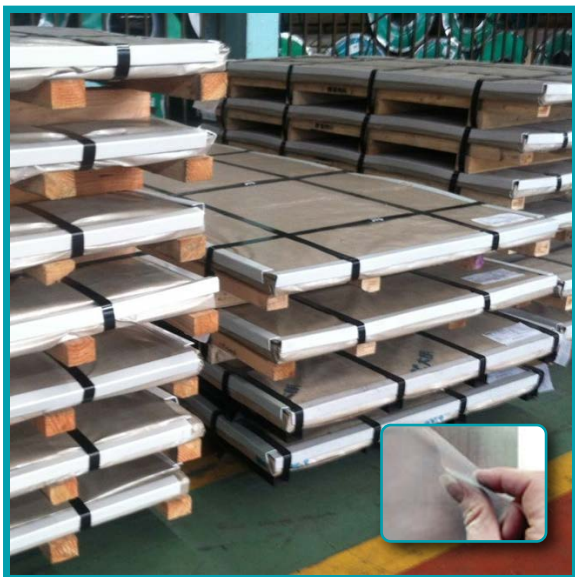

FICHA TÉCNICA

Producto: **Láminas de acabado satinado No.4**

DESCRIPCIÓN: Lámina de acabado satinado No.4 de calibre #24 de 4 x 8 pies. Cada lámina tiene una cubierta de PVC de alta resistencia que protege el acabado. Para su uso en proyectos arquitectónicos, construcción y varios.

CÓDIGO: LS 4X8 #24

Marca: Carbone Stainless Steel

Espesor: 0.6 mm

Calibre: #24

Medidas: 4' x 8' (pies) - 1219.2 x 2,438.0 (mm)

Acabado: Satinado No.4

Tipo: AISI 304

Norma de Fabricación: ASTM A240/480

Procedencia: Importado

EMPRESAS CARBONE S.A.				Certificate No. 180206C0022			
Product	PRIME COLD ROLLED STAINLESS STEEL SHEET						
Specification	ASTM A240M-16a/A480M-16b						
Steel Grade	304	Finish	N0.4		Protect	PE	

Item No.	Heat No.	Product Description			Chemical Composition(%)								Tension Test			*01	*02	C/No	
		Dimensions	Quantity Pcs	Weight kgs	C	Si	Mn	P	S	Ni	Cr	N	0.2% Y.S.	T.S.	E.L.				
					X10 ⁻³	X10 ⁻²	X10 ⁻²	X10 ⁻³	X10 ⁻³	X10 ⁻²	X10 ⁻²	X10 ⁻³	MPa	%	HRB				°C/W.Q.
Specification				Min. Max.	70	75	200	45	30	800	1750	1050	205	515	40	92	1040		
1	C34AW1801438	0.9mm x1,219.0mm x2,438.0mm	110	2,333	17	46	158	32	6	800	1824	50	288	658	55	85	1050	31	
2	C34AW1801438	0.9mm x1,219.0mm x2,438.0mm	110	2,333	17	46	158	32	6	800	1824	50	288	658	55	85	1050	32	
3	C34AW1801438	0.9mm x1,219.0mm x2,438.0mm	110	2,333	17	46	158	32	6	800	1824	50	288	658	55	85	1050	33	
4	C34AT1800411	0.8mm x1,219.0mm x2,438.0mm	100	1,885	23	46	86	31	2	814	1817	69	298	670	55	28	1050	34	
5	C33AT1801598	0.6mm x1,219.0mm x2,438.0mm	100	1,414	42	50	93	34	3	803	1808	58	319	672	53	84	1050	35	
TOTAL:			100	1,768															
Remark																		Note	
Visual Inspection(Surface) and Dimension Check : OK																		*01 = Hardness Test	
																		*02= Heat Treatment	
																		*Gauge Length: 50mm	
Surveyor By																		1 MPa=1 N/mm²=10bar=145psi=10.2kgf/cm²	
N/A										We hereby certify that material described herein has been manufactured and tested with satisfactory results ip accordance with the requirement of the above material specification. The material described above has been found free of radiation by raw material supplier.								1.ISO 9001:2015 (No.01100056299) 2.PED/AD2000 (No.01202TWN/Q-050105) 3.ISO 14001:2004 (No.01104822096385) 4.OHSAS 18001:2007 (No.01113822096385)	