
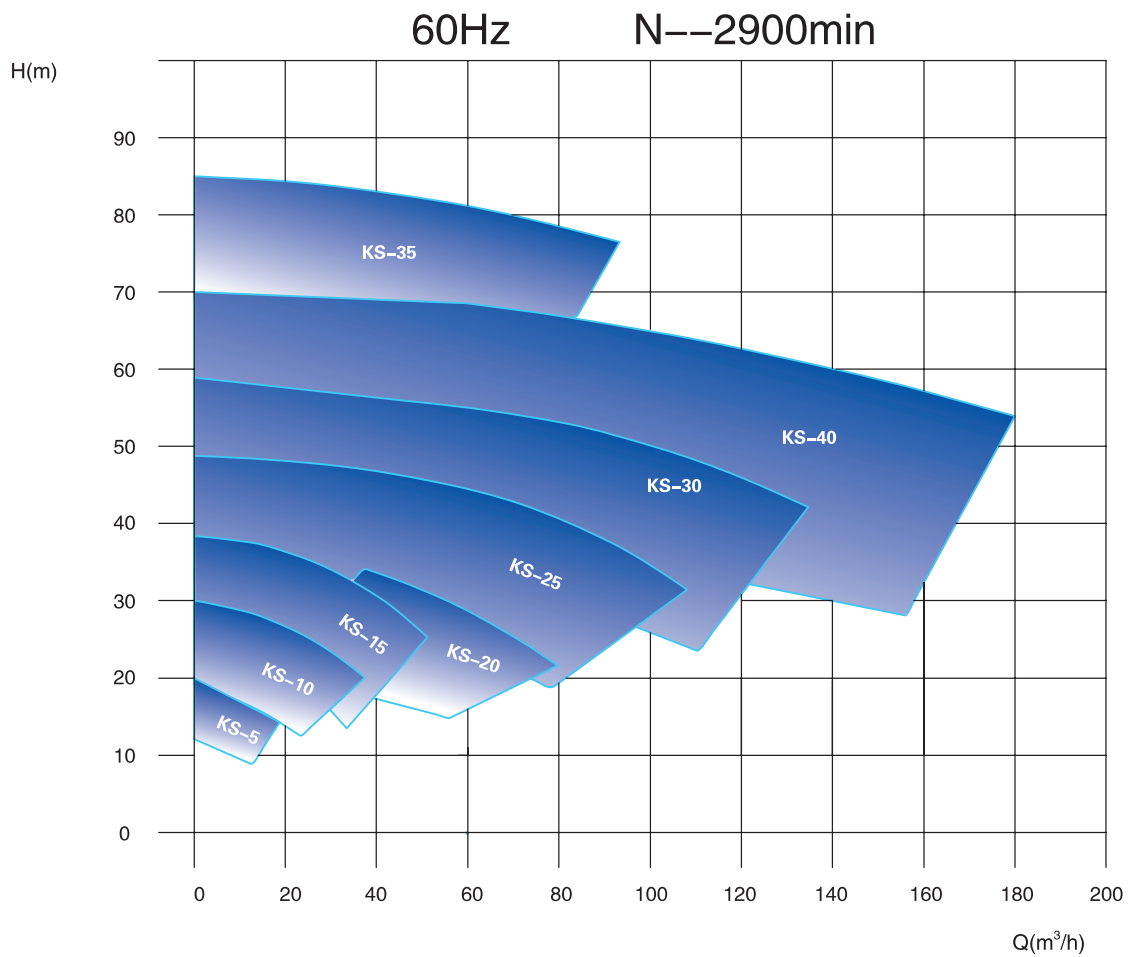


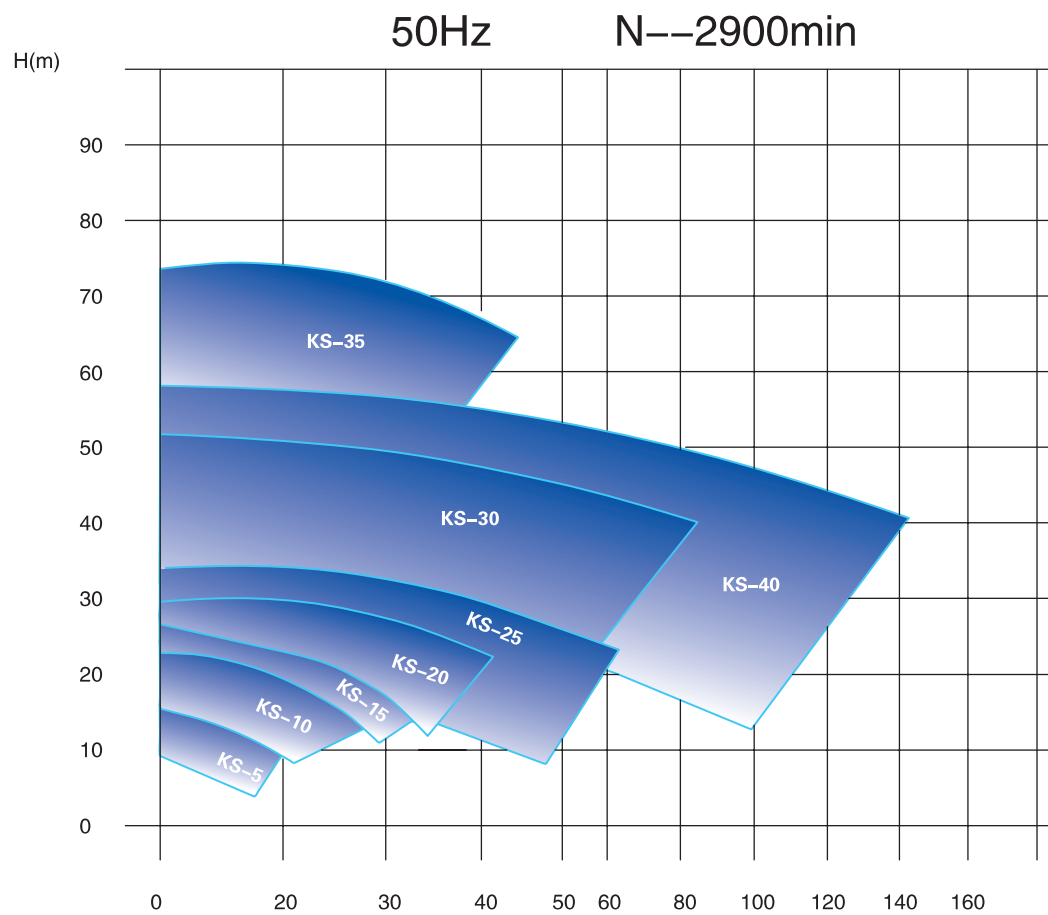


KS-5

N--2900min

Medium: 20°C Water	Impeller dia: 120mm / 100mm	Inlet dia.: 38.1mm
Tolerance: ± 5%	Frequency: 50Hz	Outlet dia.: 38.1mm

Performance Curve

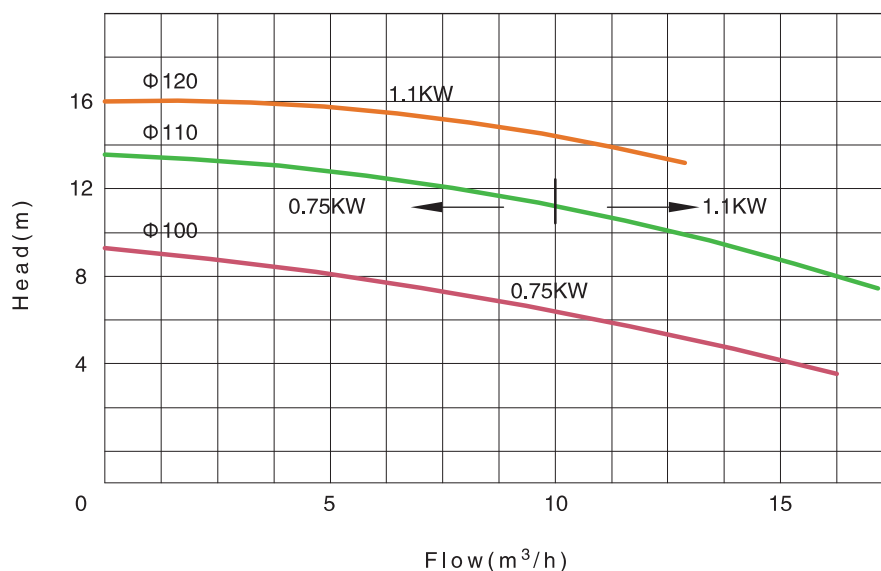


KS-5

N--3600min

Medium: 20°C Water	Impeller dia: 120mm / 100mm	Inlet dia.: 38.1mm
Tolerance: ± 5%	Frequency: 60Hz	Outlet dia.: 38.1mm

Performance Curve


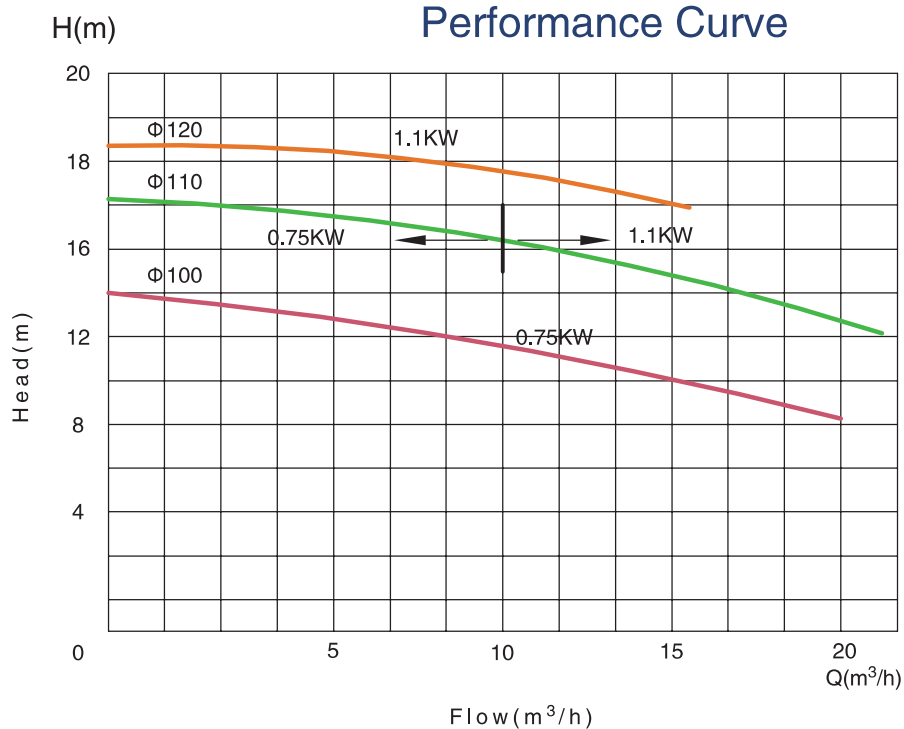


KS-10

N--2900min

Medium: 20℃ Water	Impeller dia: 140mm / 100mm	Inlet dia.: 38.1mm
Tolerance: ± 5%	Frequency: 50Hz	Outlet dia.: 38.1mm

Performance Curve

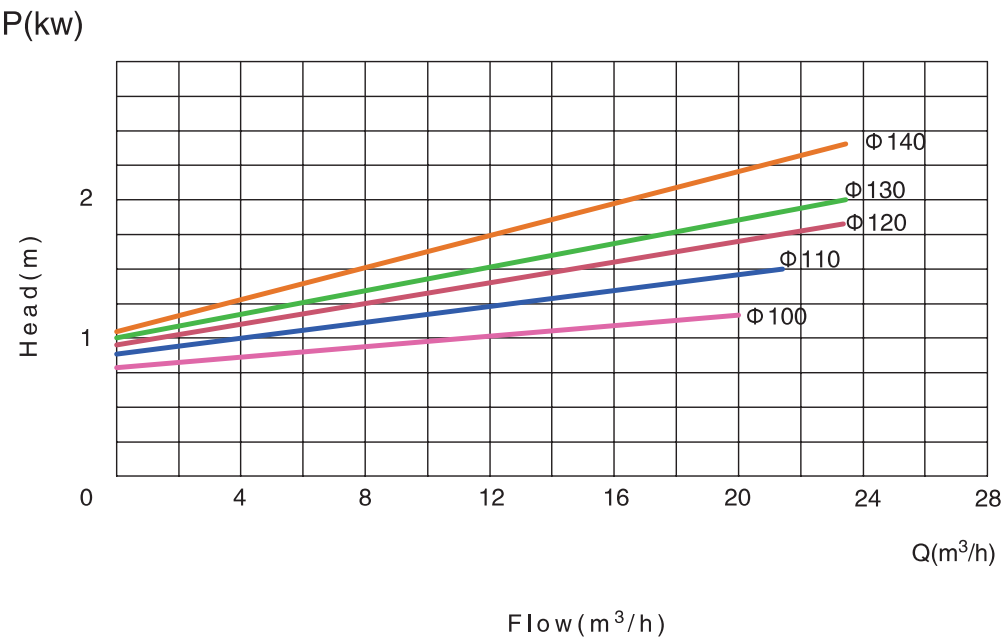
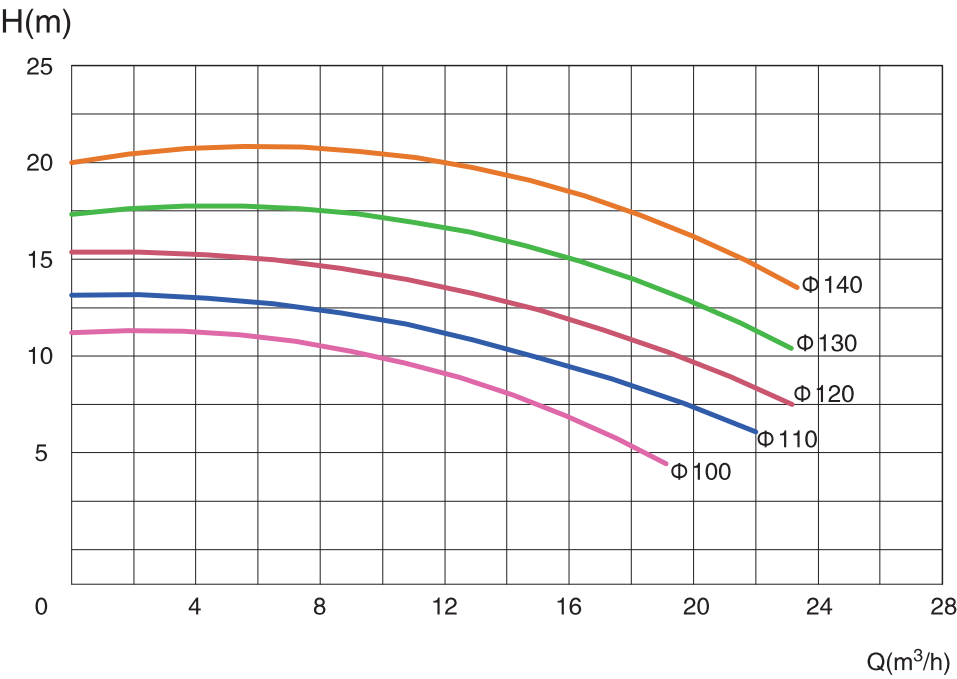


KS-10

N--3600min

Medium: 20℃ Water	Impeller dia: 140mm / 100mm	Inlet dia.: 38.1mm
Tolerance: ± 5%	Frequency: 60Hz	Outlet dia.: 38.1mm

Performance Curve

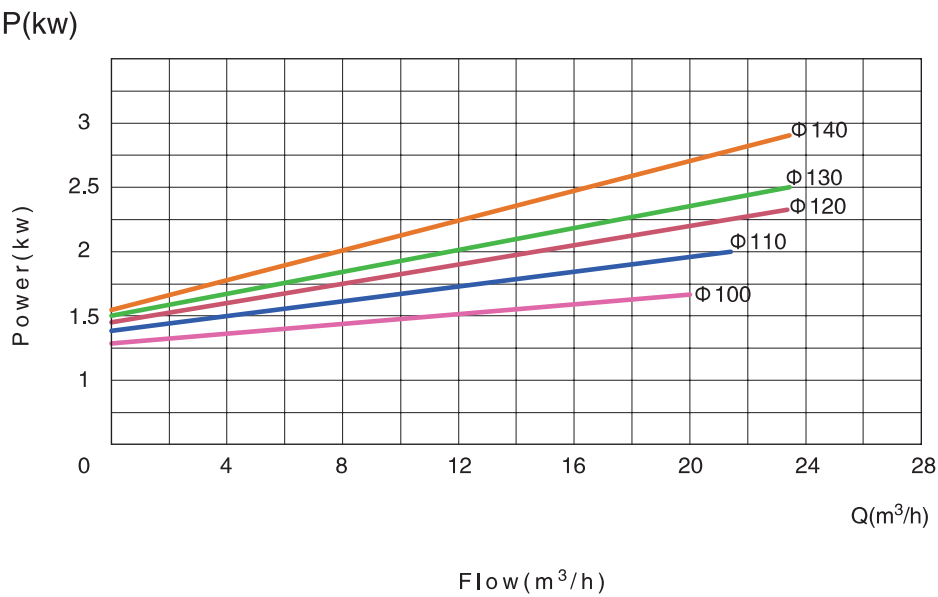
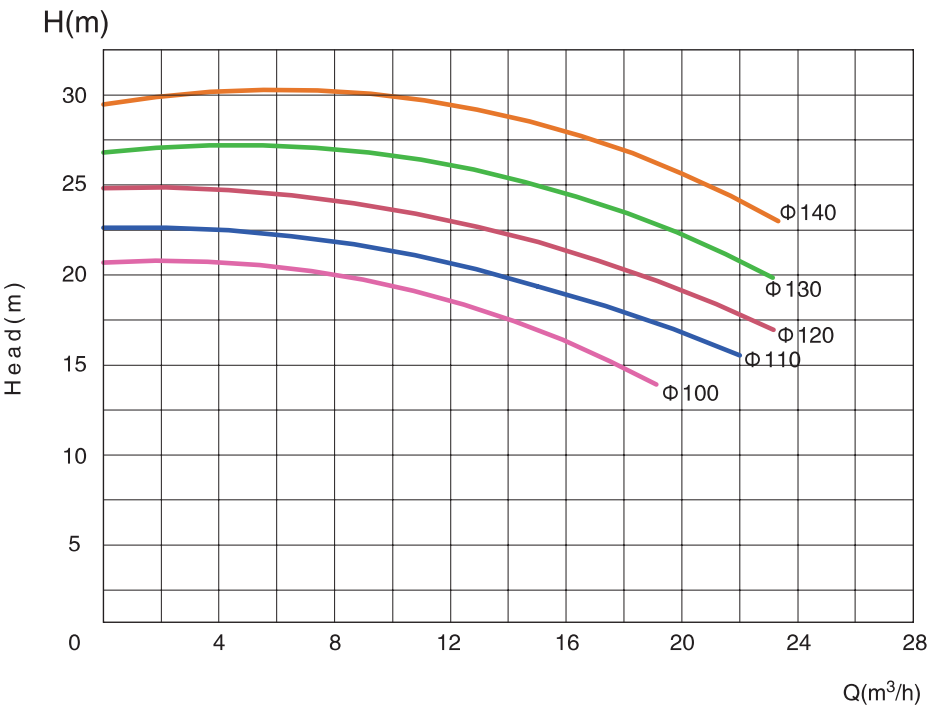


KS-15

N--2900min

Medium: 20°C Water	Impeller dia: 160mm / 120mm	Inlet dia.: 50.8mm
Tolerance: ± 5%	Frequency: 50Hz	Outlet dia.: 38.1mm

Performance Curve

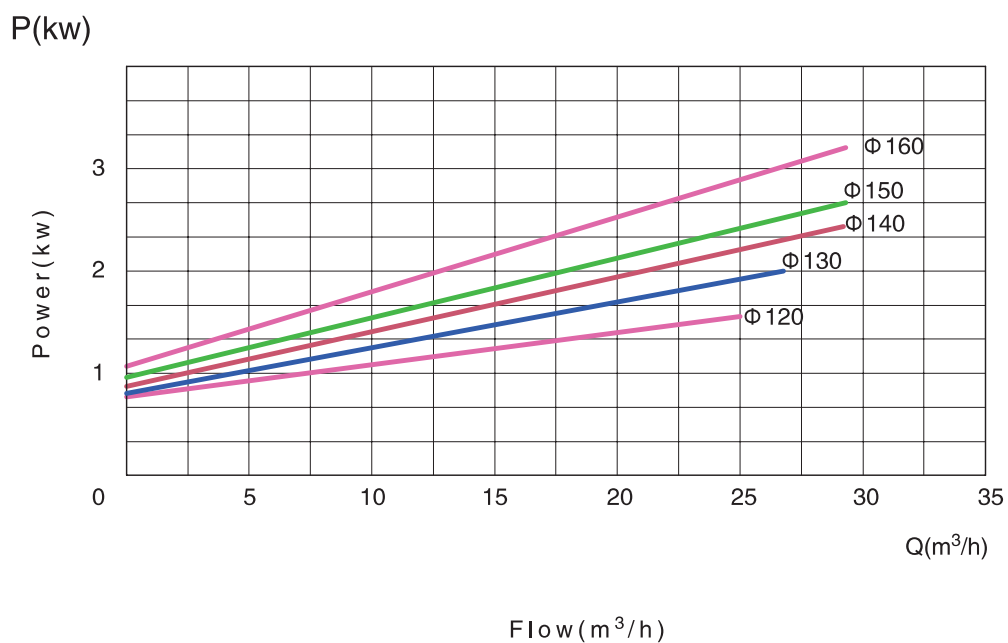
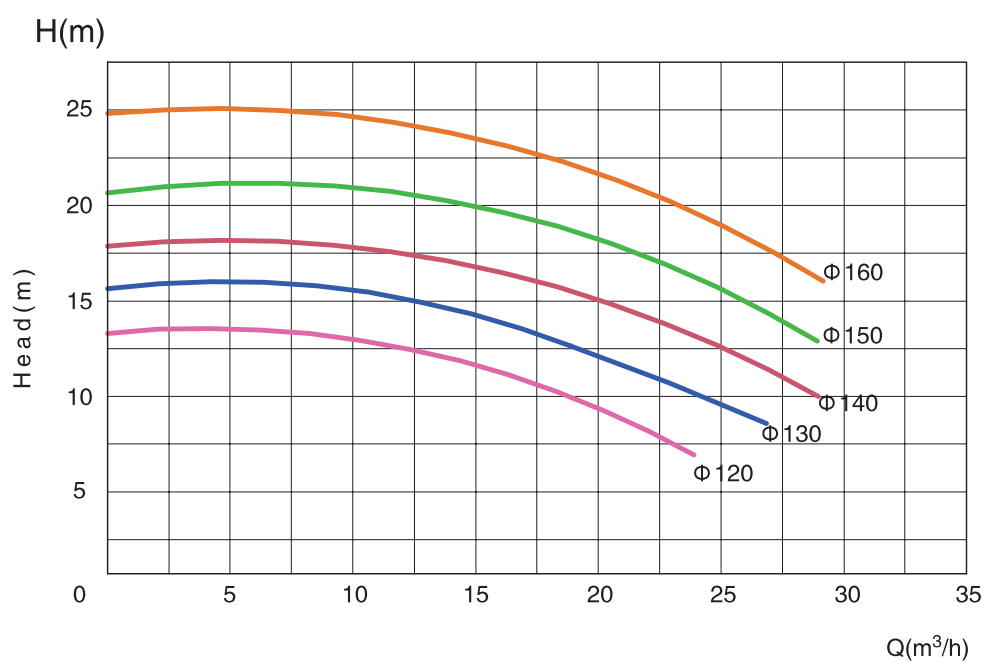


KS-15

N--3600min

Medium: 20°C Water	Impeller dia: 160mm / 120mm	Inlet dia.: 50.8mm
Tolerance: ± 5%	Frequency: 60Hz	Outlet dia.: 38.1mm

Performance Curve

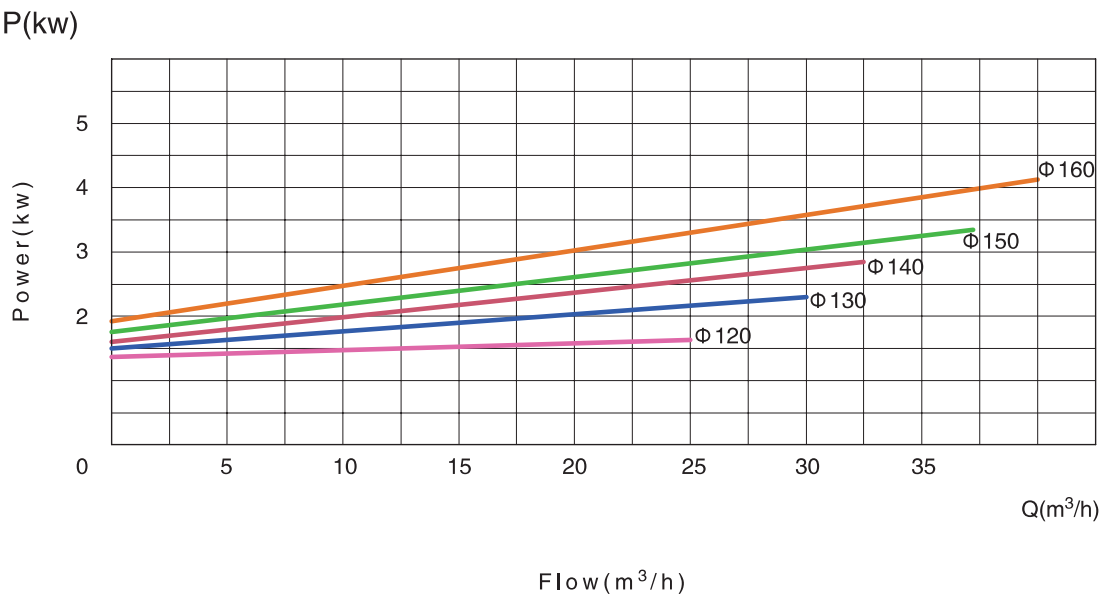
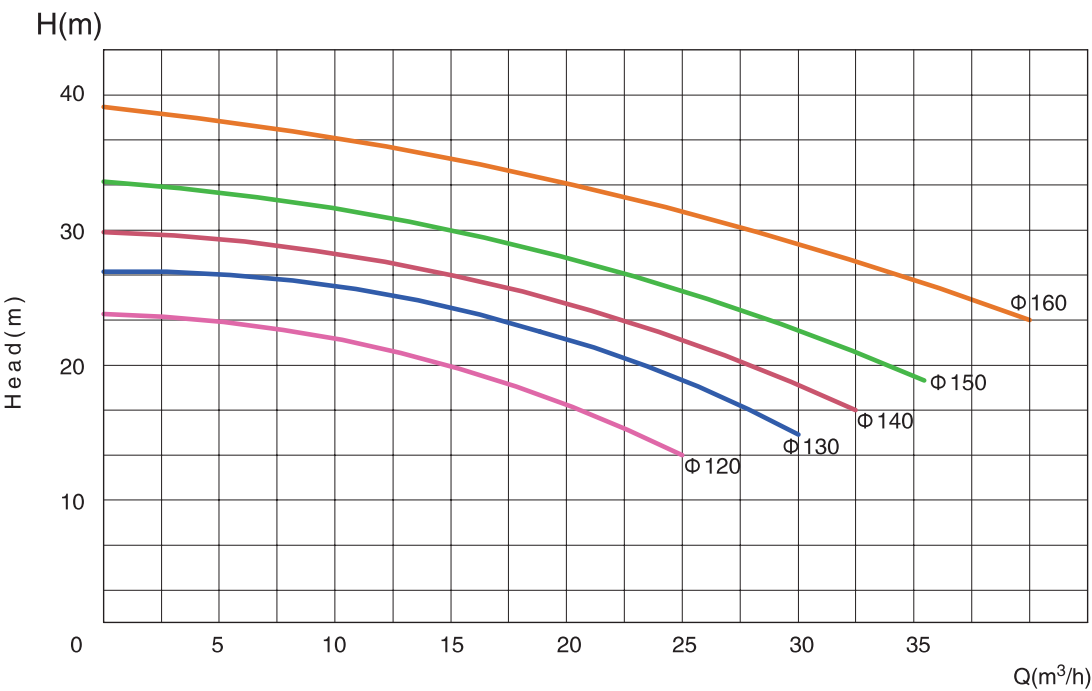


KS-20

N--2900min

Medium: 20℃ Water	Impeller dia: 160mm / 120mm	Inlet dia.: 63.5mm
Tolerance: ± 5%	Frequency: 50Hz	Outlet dia.: 50.8mm

Performance Curve

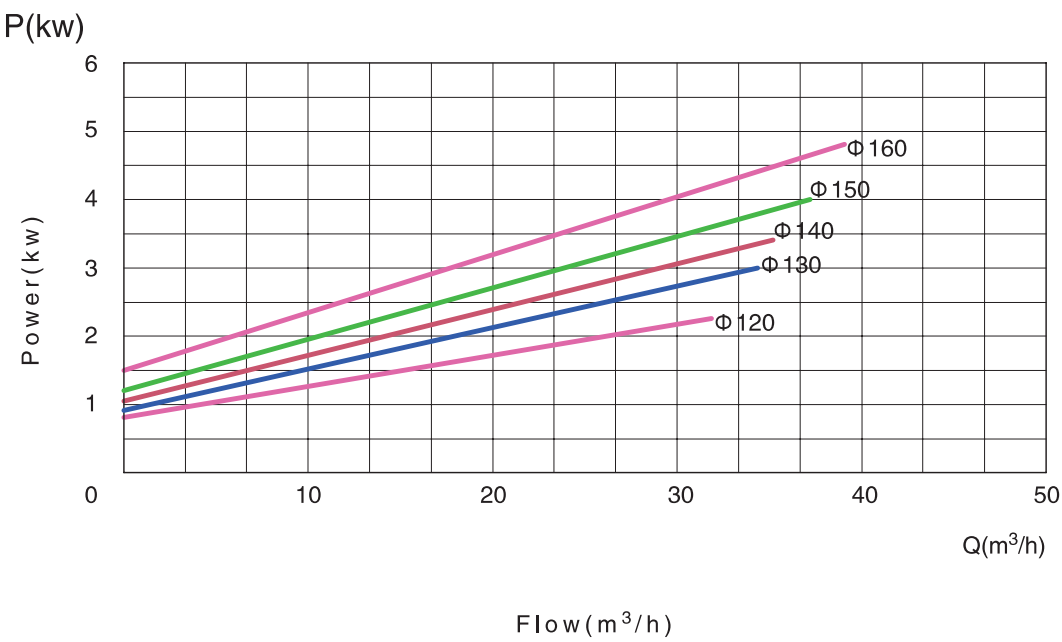
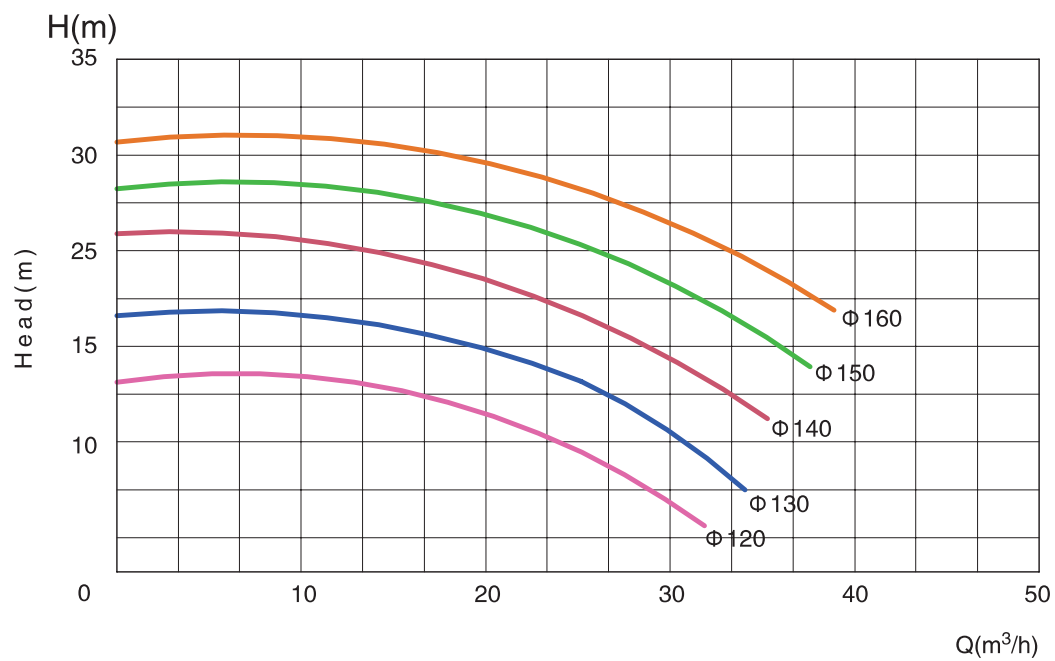


KS-20

N--3600min

Medium: 20℃ Water	Impeller dia: 160mm / 120mm	Inlet dia.: 63.5mm
Tolerance: ± 5%	Frequency: 60Hz	Outlet dia.: 50.8mm

Performance Curve

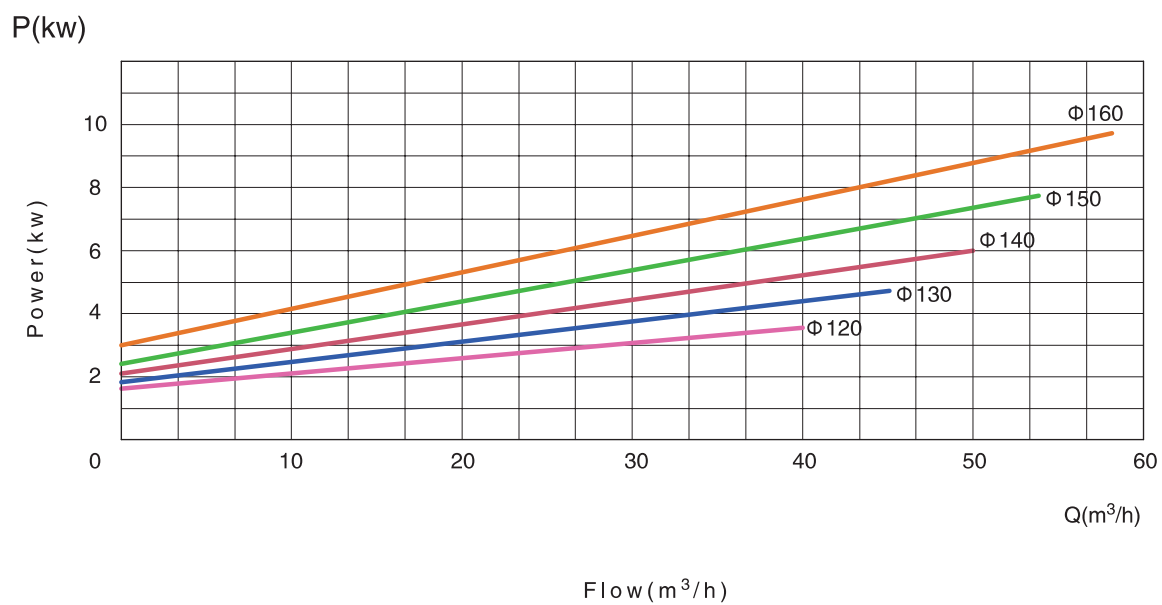
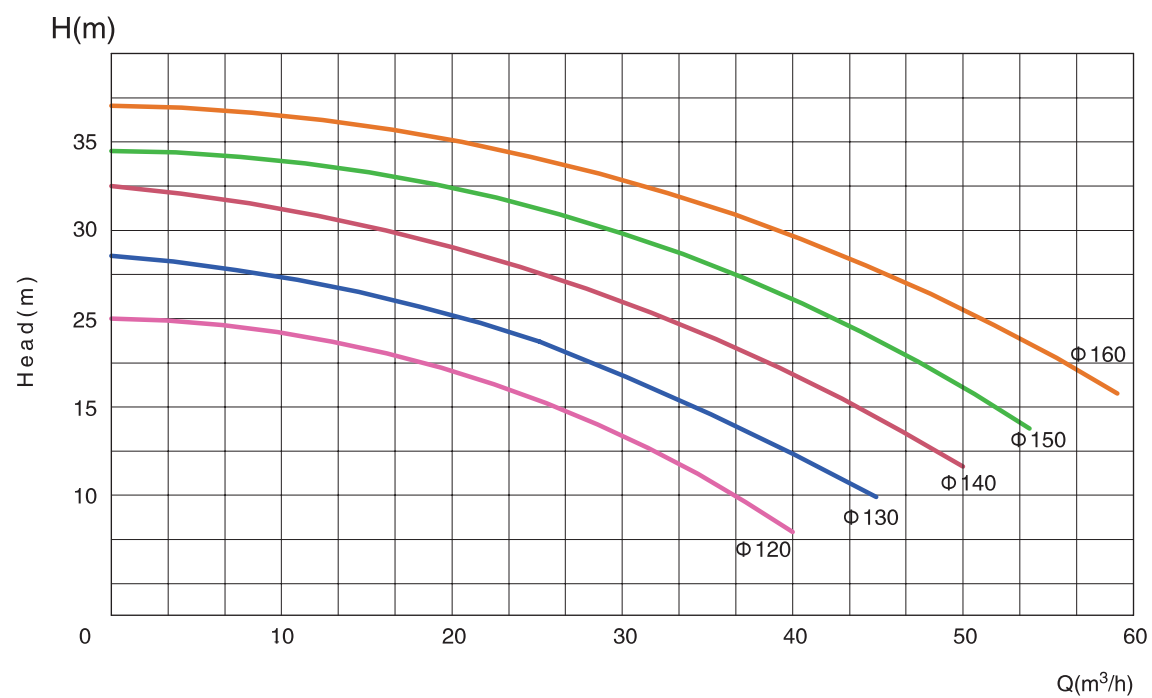


KS-25

N--2900min

Medium: 20°C Water	Impeller dia: 175mm / 135mm	Inlet dia.: 63.5mm
Tolerance: ± 5%	Frequency: 50Hz	Outlet dia.: 50.8mm

Performance Curve

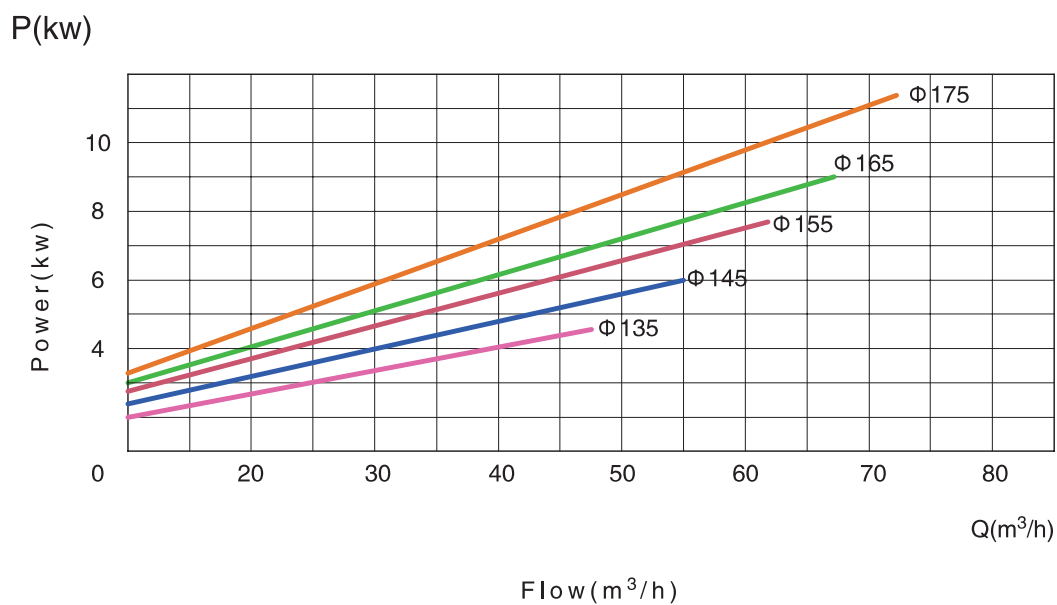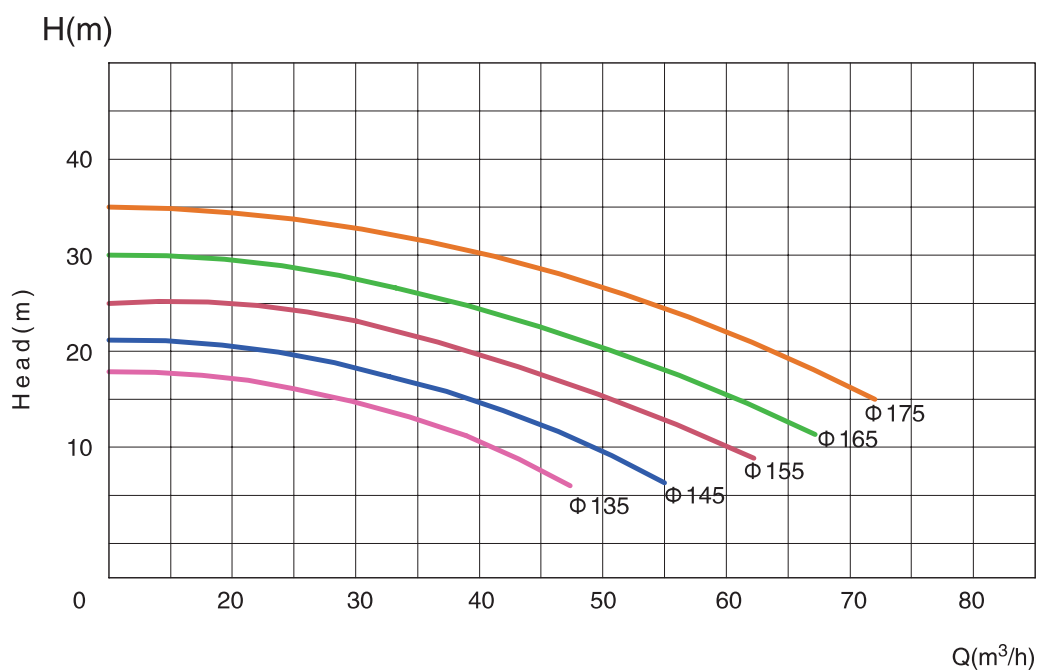


KS-25

N--3600min

Medium: 20℃ Water	Impeller dia: 175mm / 135mm	Inlet dia.: 63.5mm
Tolerance: ± 5%	Frequency: 60Hz	Outlet dia.: 50.8mm

Performance Curve


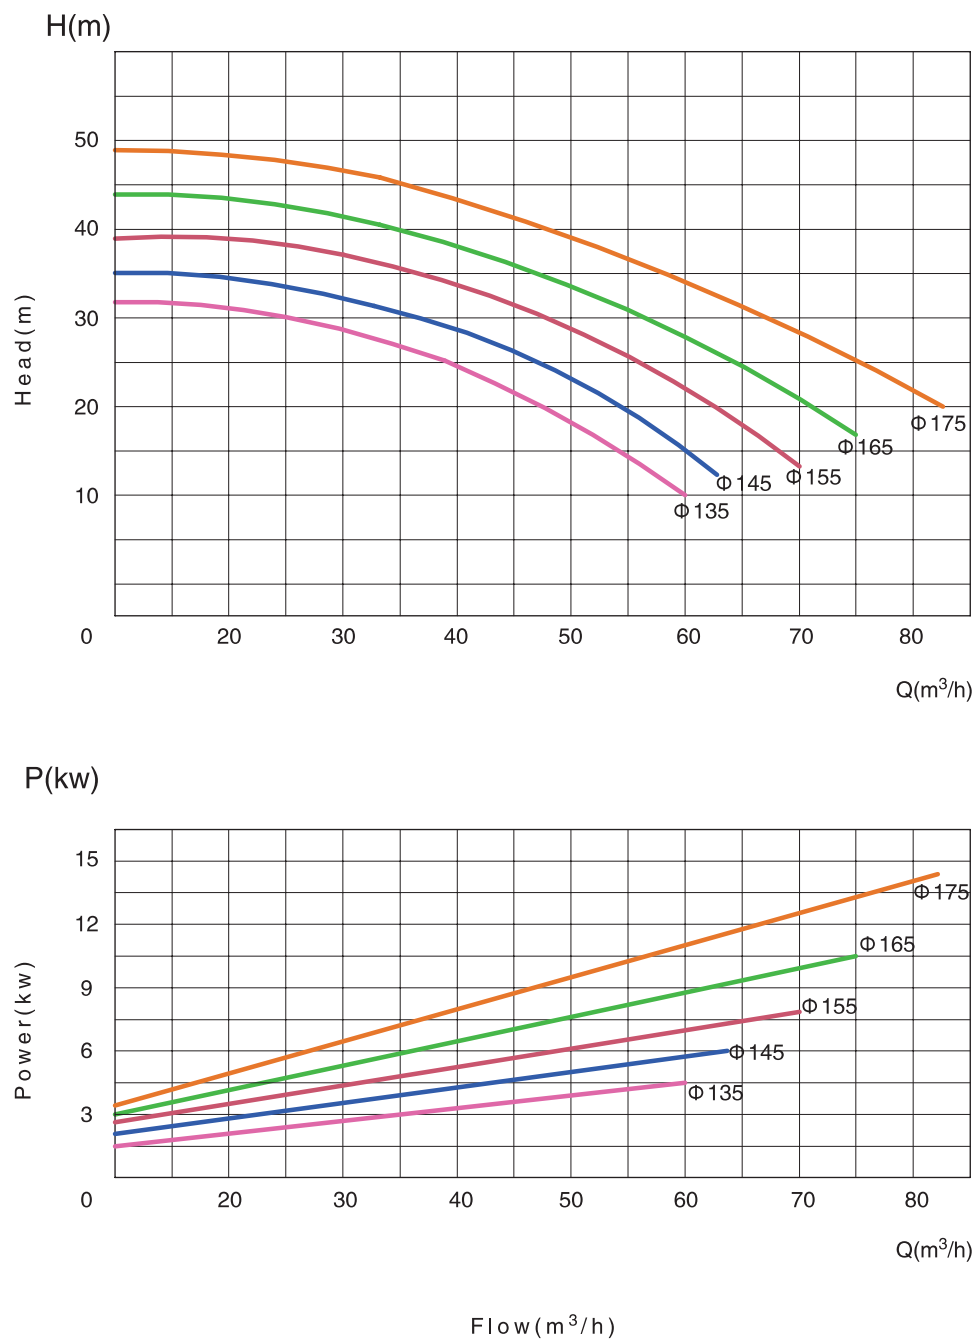


KS-40

N--2900min

Medium: 20℃ Water	Impeller dia: 210mm / 170mm	Inlet dia.: 76.2mm
Tolerance: ± 5%	Frequency: 50Hz	Outlet dia.: 63.5mm

Performance Curve

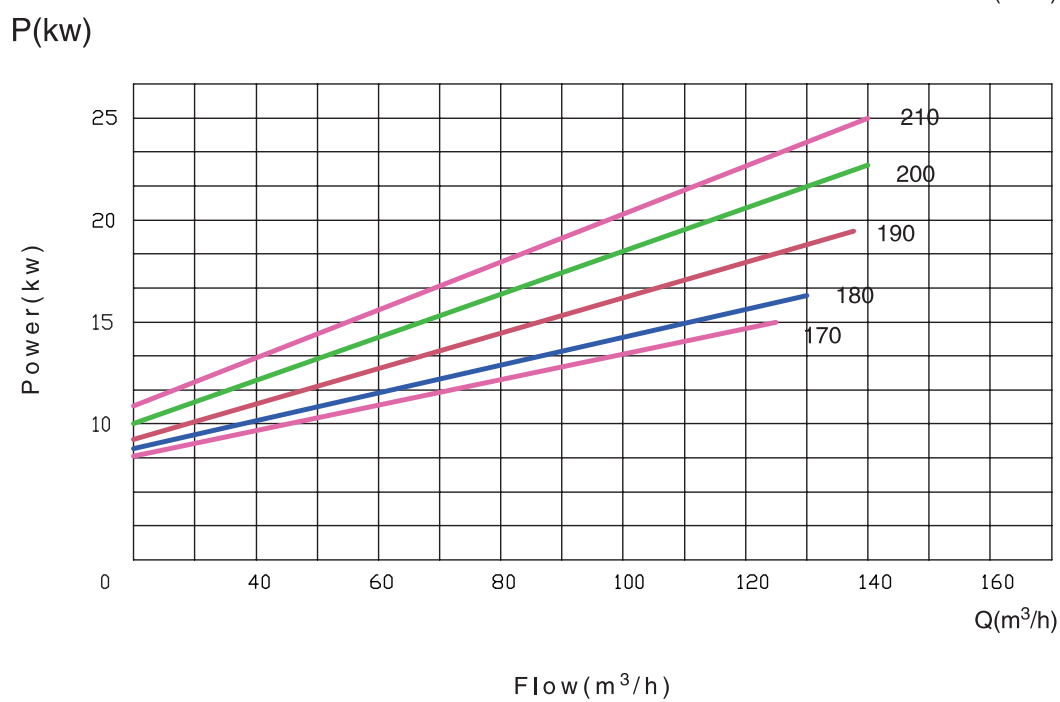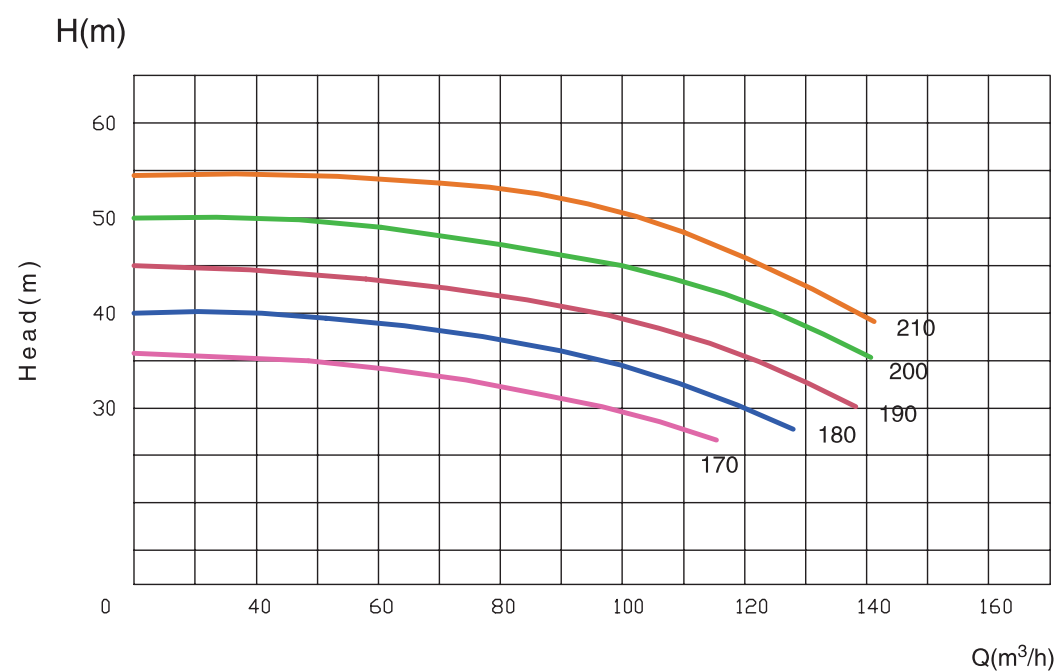


KS-40

N--3600min


Medium: 20℃ Water	Impeller dia: 210mm / 170mm	Inlet dia.: 76.2mm
Tolerance: ± 5%	Frequency: 60Hz	Outlet dia.: 63.5mm

Performance Curve

H(m)

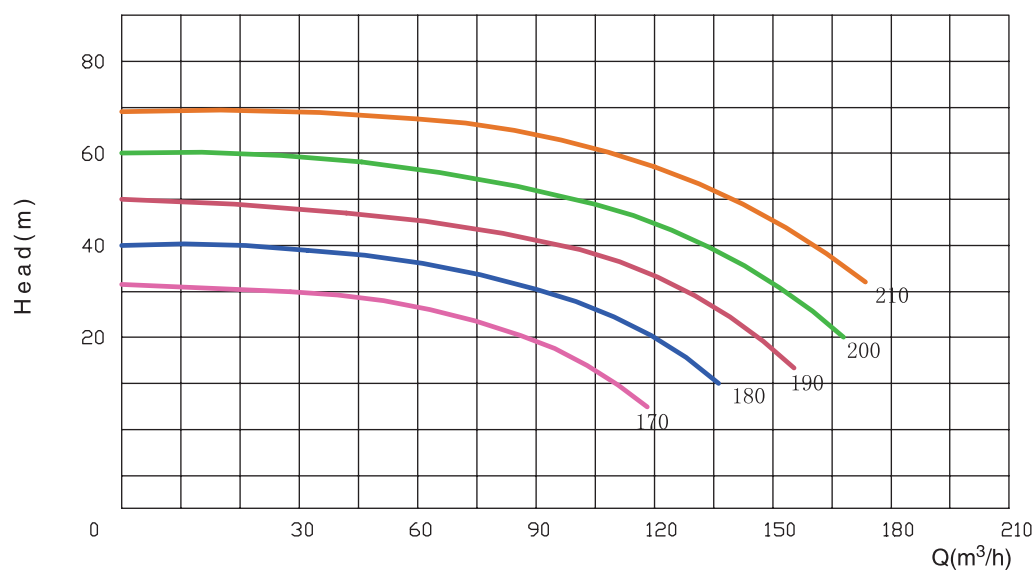

P(kw)

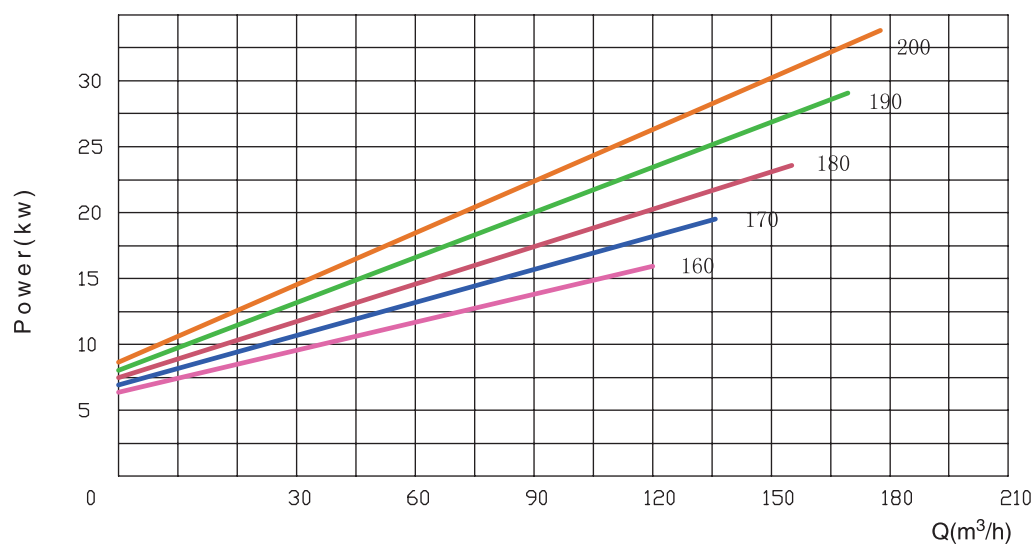

Flow (m³/h)